


SANO

Our Pinxel model is specially designed to deliver RF energy directly to the epidermis or dermis skin layer. This stimulates and re-models collagen effectively by either RF micro-needling mode (invasive) or RF matrix mode (non-invasive). It can be used for both epidermal and dermal applications in one platform, without changing the operating environment.






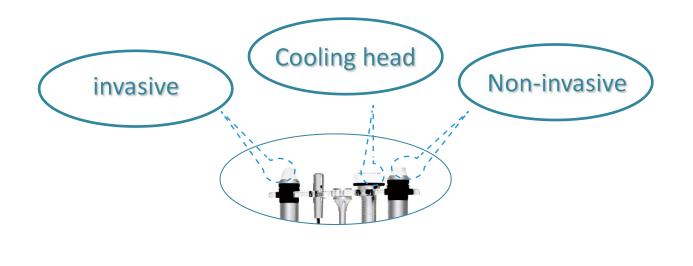

Fractional RF Micro-Needle Treatment area : Middle & Lower Dermis

Fractional RF Sub-lative Rejuvenation Treatment area : Epidermis & Superficial Dermis

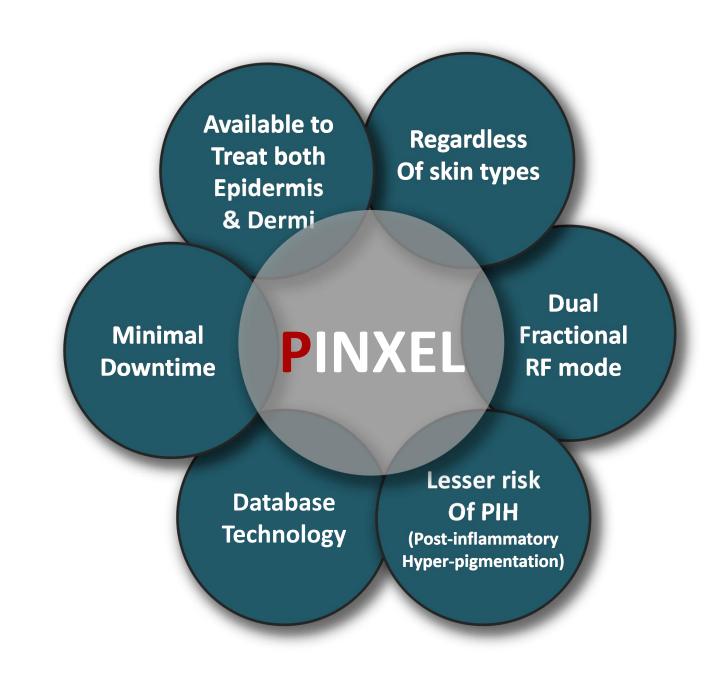


Specification of Pinxel

Specifications		
System Type	Mono & Bipolar RF	
	Bipolar RF	
Frequency	2MHz	
Total RF Treatment Level	Up to Level 10	
Dual Operation Mode	Fractional RF Micro-needle	
	Fractional RF Sub-lative	
Max Energy	50W	
Disposable Tip	Micro-electrode needle	
	Micro- electrode tip	
Depth of Needle	0.5 - 3 mm (Adjustable)	
Cooling head	Cooling head -10°C	
Display	10.4 inch LCD	
Switch	Foot Switch	
Dimension(mm)	280mm(W) x 505mm(L) x 1100mm(H)	
Weight	20kg	
Electrical Requirements	AC/100-240 V, 50-60 Hz	

RF versus Laser

Radio Frequency

- All skin types
- Easily penetrates target area
- Less side-effect risk
- Easily controlled depth
- Energy directly to target area with no energy loss

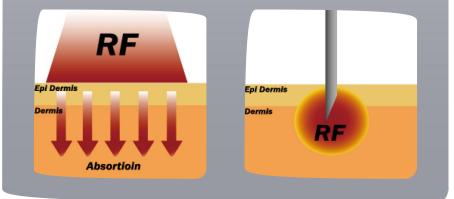


Laser

- Selective laser absorption
- Penetrations vary per absorption rate for water, hemoglobin, melanin etc
- Depth control difficult
- Energy delivery to target area varies depending on many parameterse



Advantage of RF fractional

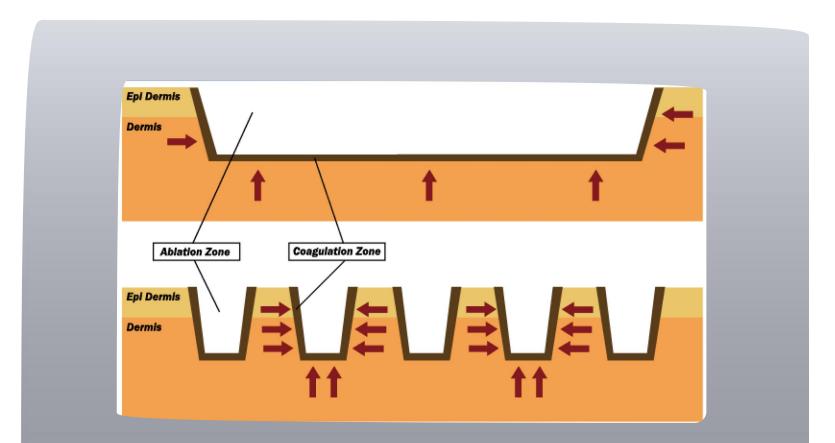

Fractional technology results in quick wound healing reaction from surrounding, undamaged tissue.




Fractional RF Micro needle

· For invasive treatments.

• Effective, direct thermal stimulation to remodel collagen with less epidermis damage.


• Effective, direct thermal stimulation to remodel collagen with less epidermis damage.

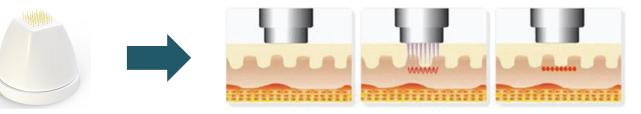

Micro Needle (Direct energy delivery) Radio Frequency (Thermal Damage) Satisfactory Results


Fractional RF Micro needle



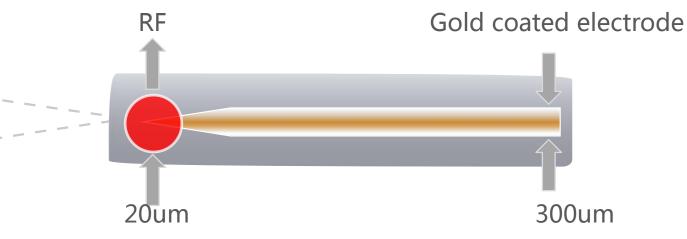

• Micro Needle RF penetrates target area from epidermis to dermis without energy loss; stimulates and efficiently remodels disordered collagen.


 \cdot Step-motor driven mechanism enables precise, accurate penetration depth control.

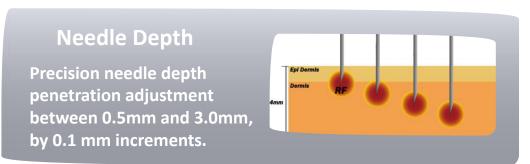


Fractional RF Micro needle

Duration time & energy

fields, as per application. Emissions 0.1 sec to 0.9 seconds; intensity level range 1 to 10.

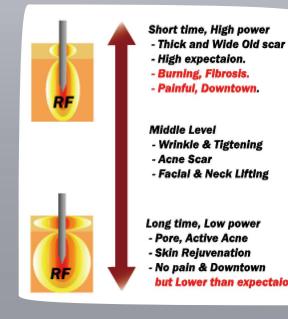

Power 1.6 Power 1.6 (0.8 sec X Intensity 2) **Epi Dermis Epi Dermis** Dermis Dermis RF RF Long time and but Lower than expectaion Low Intensity



Short time and **High Intensity**



Fractional RF


 Fractional RF delivers thermal energy to the treatment area more safely and effectively, allowing treatment regardless of skin type.
The laser energy is mostly absorbed by melanin, especially in darker skin which contains a higher melanin content.

• Laser resurfacing can be damaging to the epidermal level, making dark skin laser treatment particularly risky. RF however avoids melanin targeting since it no longer depends on a light & laser energy to heat the skin, making Fractional skin rejuvenation a safe treatment method.




Non-invasive Fractional RF provides significant lifting effects.




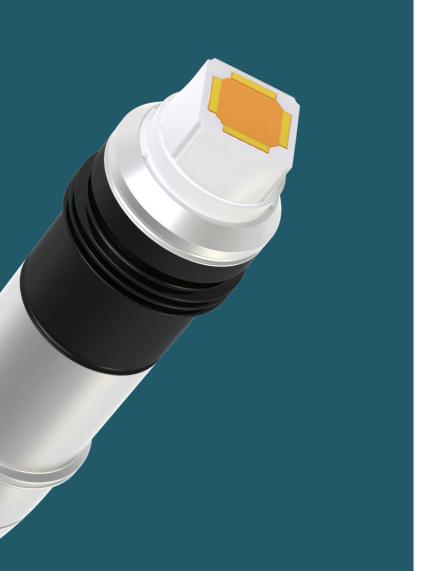

 \cdot Laser energy penetration is weakened by any absorption of water, hemoglobin, melanin, etc. but RF energy penetrates the target area without absorption.

 \cdot Energy pores on surface of skin are closely connected with period, so smaller pores equals a shorter recovery time.

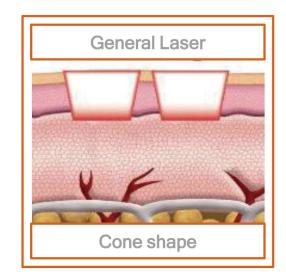

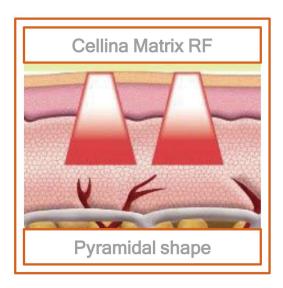




RF Needle Tip

No burn or side effect risk. Better energy delivery results. Easily controlled depth penetration. Acne Scar, Large pore, Wrinkle, Skin tone, Skin Elasticity / Volume.


Fractional RF Tip

Less pain, shorter recovery time. No risk to sensitive skin. Deep heat for immediate effects. Skin texture, Large pore, Fine Wrinkle, Lifting, Skin Tightening.

RF Needle Tip

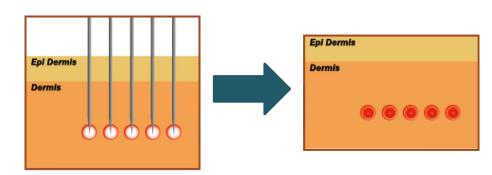

Fractional RF Tip

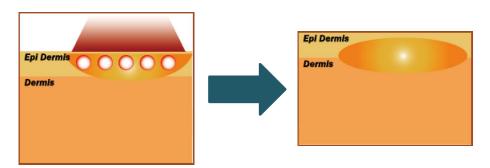

Specification of Pinxel Tips

Micro Needle RF		Matrix RF	
Energy source	RF(Radio Frequency)	Laser Type	RF(Radio Frequency)
RF Output	Max. 30 W	RF Output	Max. 50 W
RF Electrode	Bipolar / Monopolar	RF Electrode	Bipolar
Spot size	12 x 12mm(25pin) 20 x 20mm(49pin)	Spot size	12 x 12mm(64pin)
Repetition Rate	0.5-3.0sec. & manual		
Penetration depth	0.5 —3.0mm	Penetration depth	—
Duration Time (Emission)	0.1— 0.9sec	Duration Time (Emission)	0.1— 0.9sec



THANKS

Welcome to consult more!

www.sanhemedical.com

Address: 2rd floor, Building No.7, Maohuagongchang, Nancaizhen, Shunyi District, BeijingTel: 86 - 15321516360 Email: alex@sanhebeauty.net